

**2008 ODYSSEY - - [Sliding Door](#) Removal/Installation**


NOTE:

- Be sure to disable the power [sliding door](#) by turning the main switch off.
  - Have an assistant help you when removing and installing the door.
  - Use seat covers to avoid damaging any surfaces.
  - Take care not to scratch the center rail or the body.
  - Take care not to drop or damage the door.
  - Put on gloves to protect your hands.
1. Place the vehicle on a firm, level surface when removing and installing the door.
  2. [Remove the sliding door sill trim.](#)
  3. Remove the CESS articulated harness (A) from the floor panel (B).
    - 1. Disconnect the connectors (C).
    - 2. Remove the bolt.
    - 3. Release the hooks (D).


NOTE: Take care not to damage the articulated harness.

# Fastener Location

▶ : Bolt, 1





6 x 1.0 mm  
9.8 N·m  
(1.0 kgf·m, 7.2 lbf·ft)

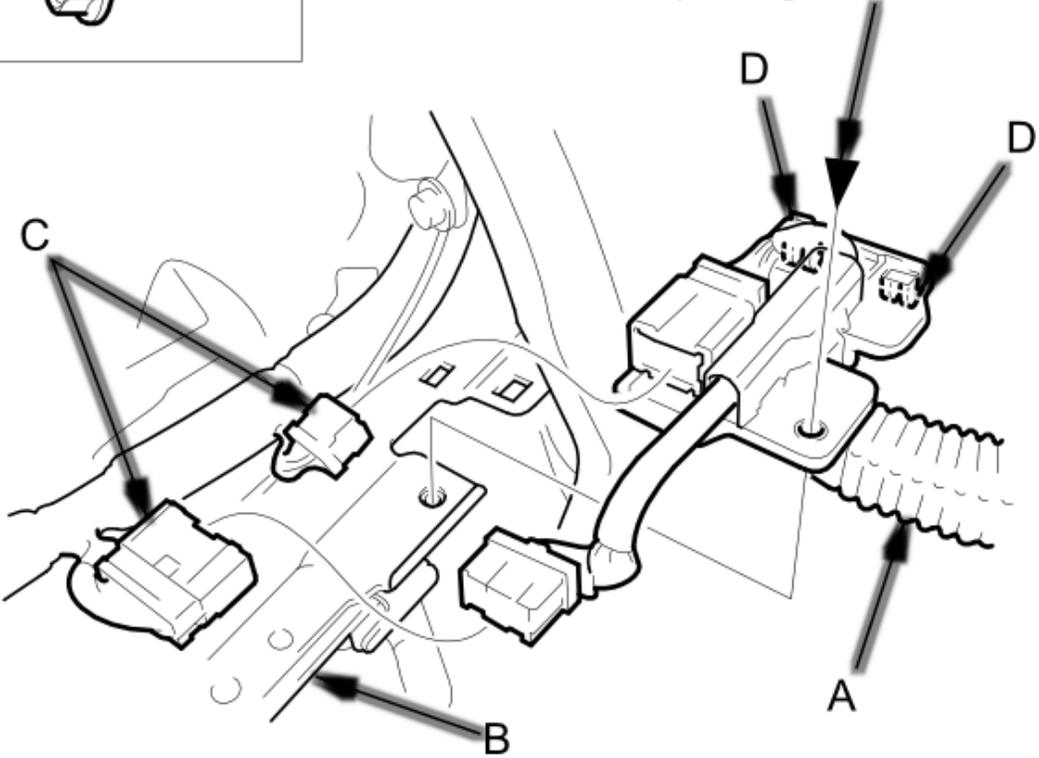

4. Remove the bolts, then remove the lower roller plate (A).

# Fastener Locations

▶ : Bolt, 2

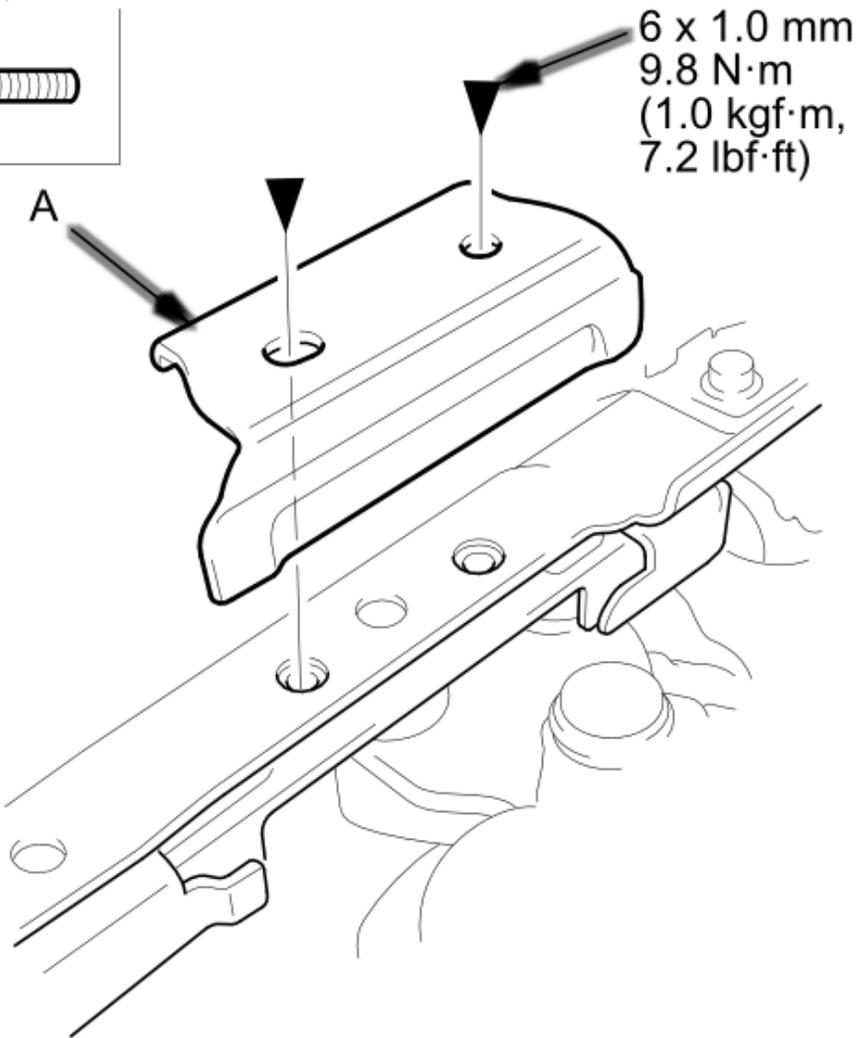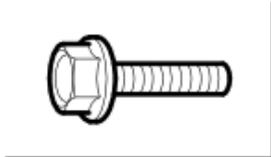


5. Remove the bolts, then remove the mid stop (A).

# Fastener Locations

▶ : Bolt, 2




6 x 1.0 mm  
9.8 N·m  
(1.0 kgf·m, 7.2 lbf·ft)

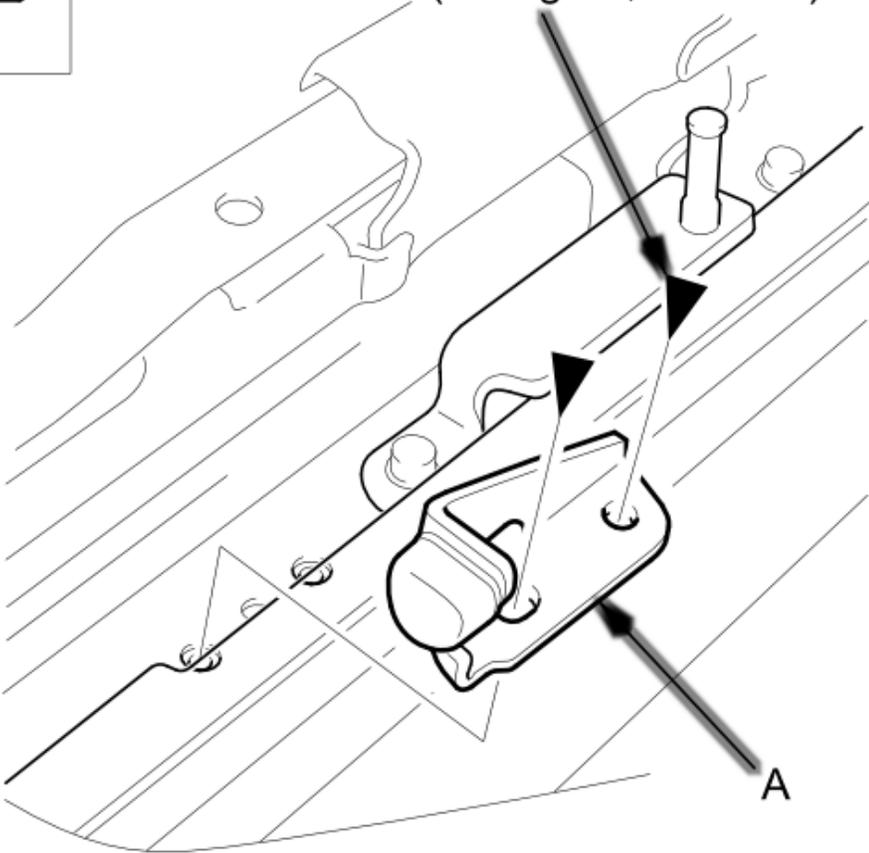


6. Remove the bolts, then remove the open stop (A).

## Fastener Locations

▶ : Bolt, 2



6 x 1.0 mm  
9.8 N·m  
(1.0 kgf·m, 7.2 lbf·ft)

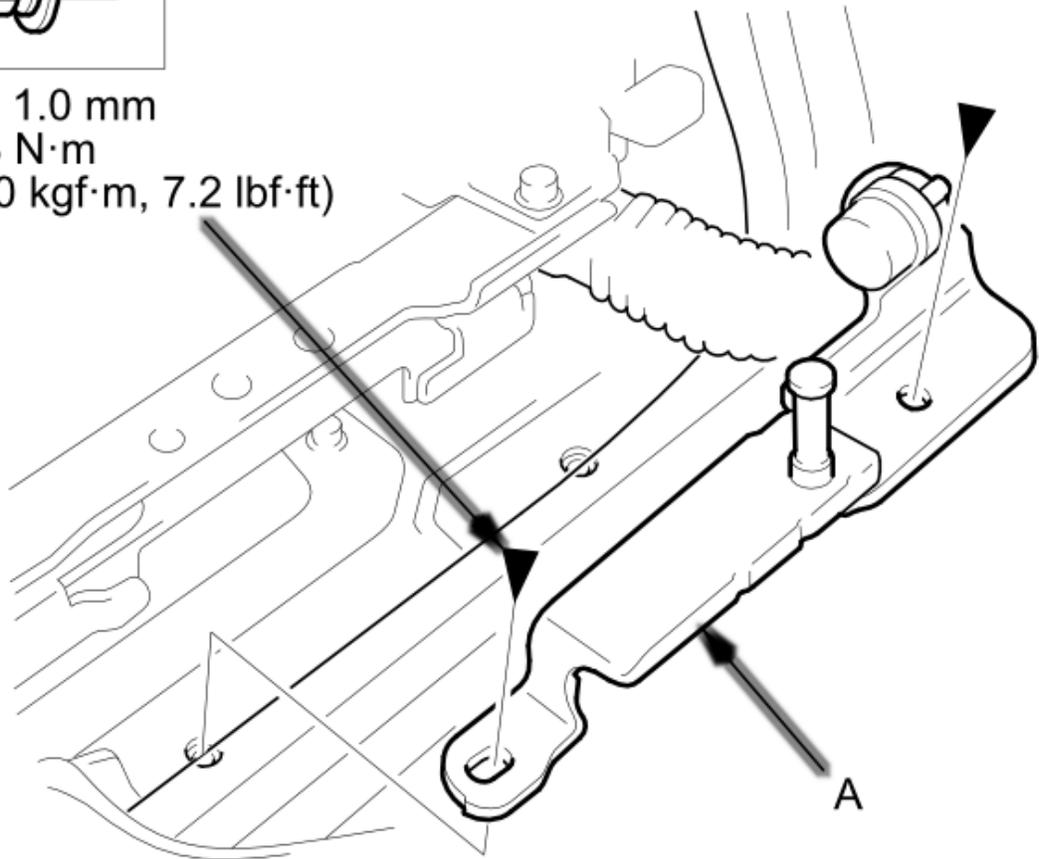


7. Detach the clips (A, B), and cut the double-sided adhesive tape (C) with a utility knife, then remove the upper rail cover (D).

**Adhesive  
tape:**      **Thickness 0.8 mm  
(0.03 in)**  
**Width 10 mm (0.39 in)**  
**Length 605 mm (23.8  
in)**


## Fastener Locations

A ▷ : Clip, 1    B ▷ : Clip, 2

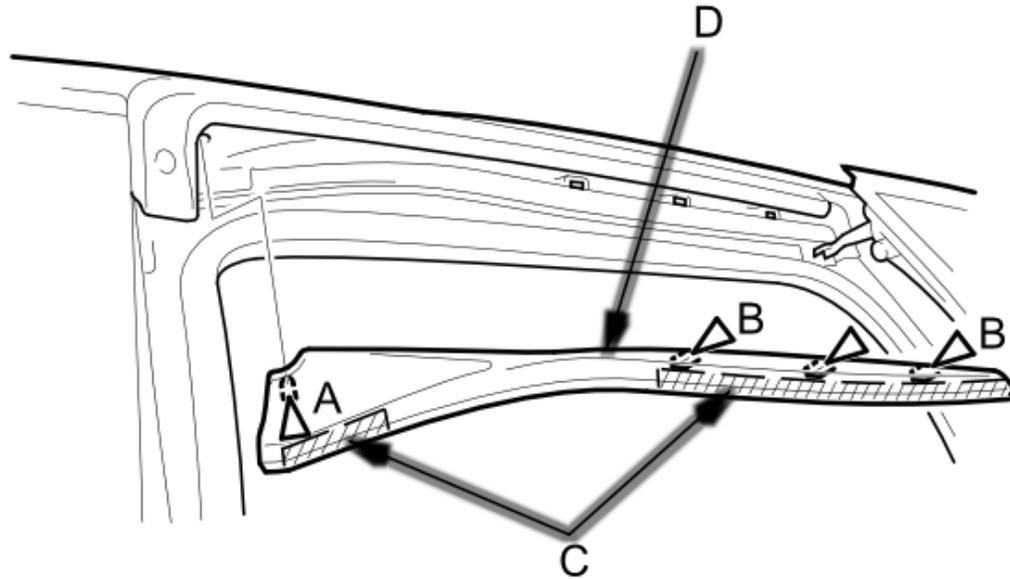


8. While holding the [sliding door](#), remove the bolts securing the center roller (A).



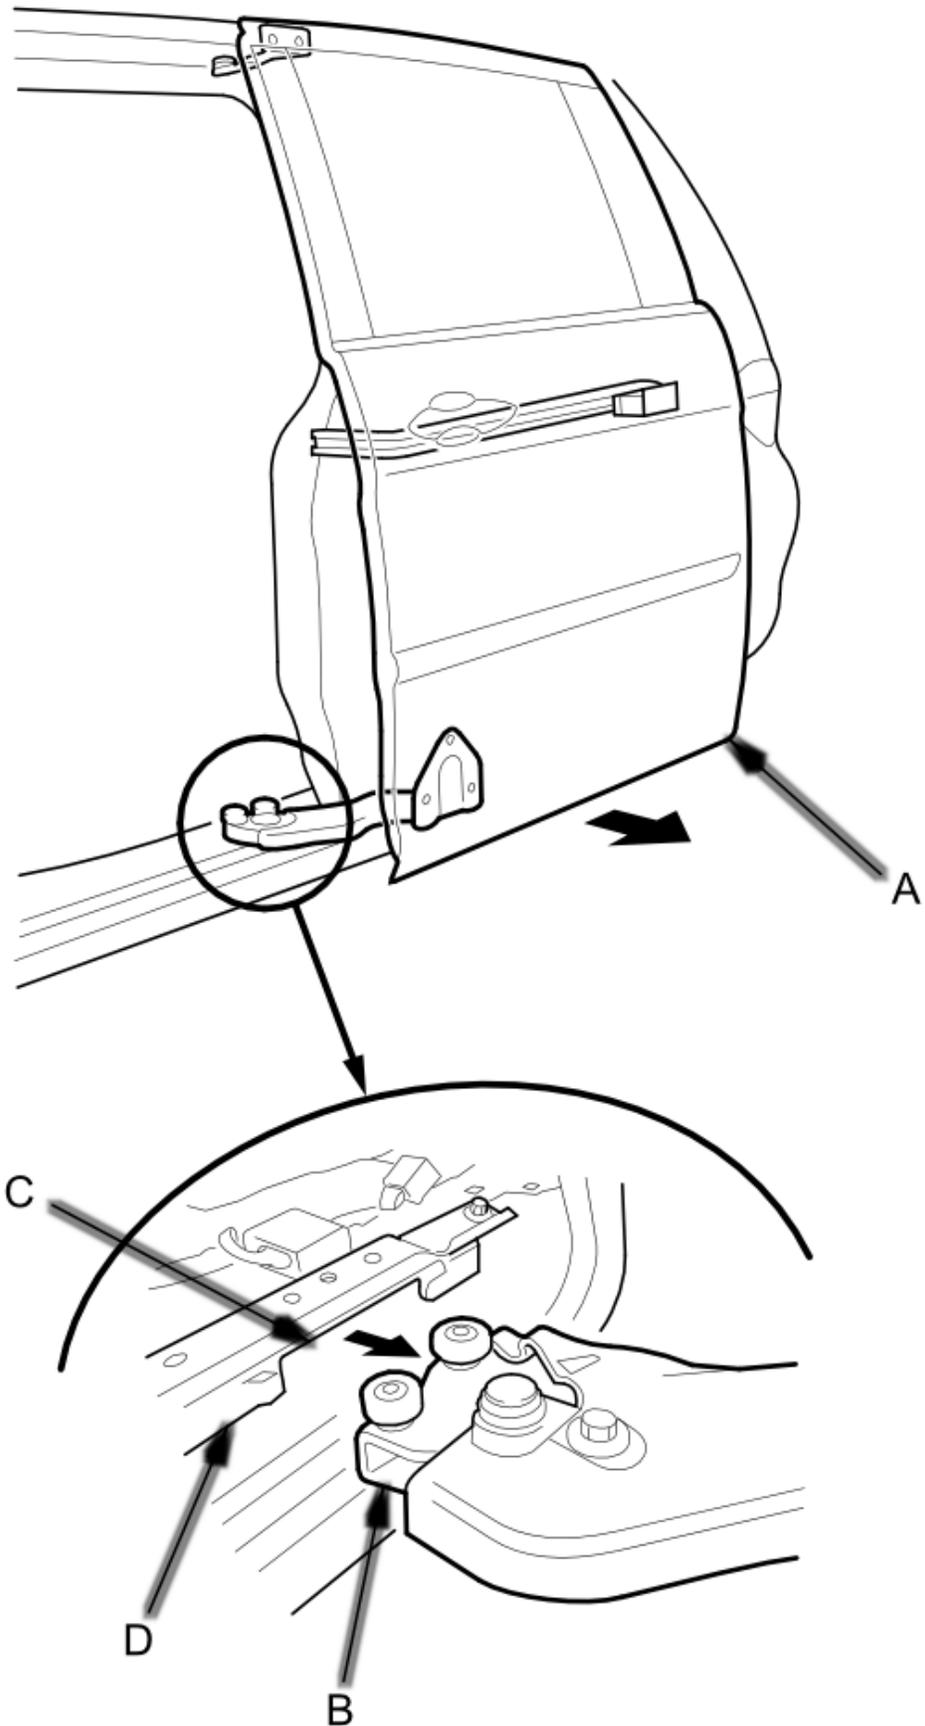



10. Hold the bottom of the [sliding door](#) (A) away from the body, and gently slide it forward until the upper roller (B) lines up with the notch (C) in the upper rail (D). While holding the door, remove the upper roller from the upper rail through the notch.

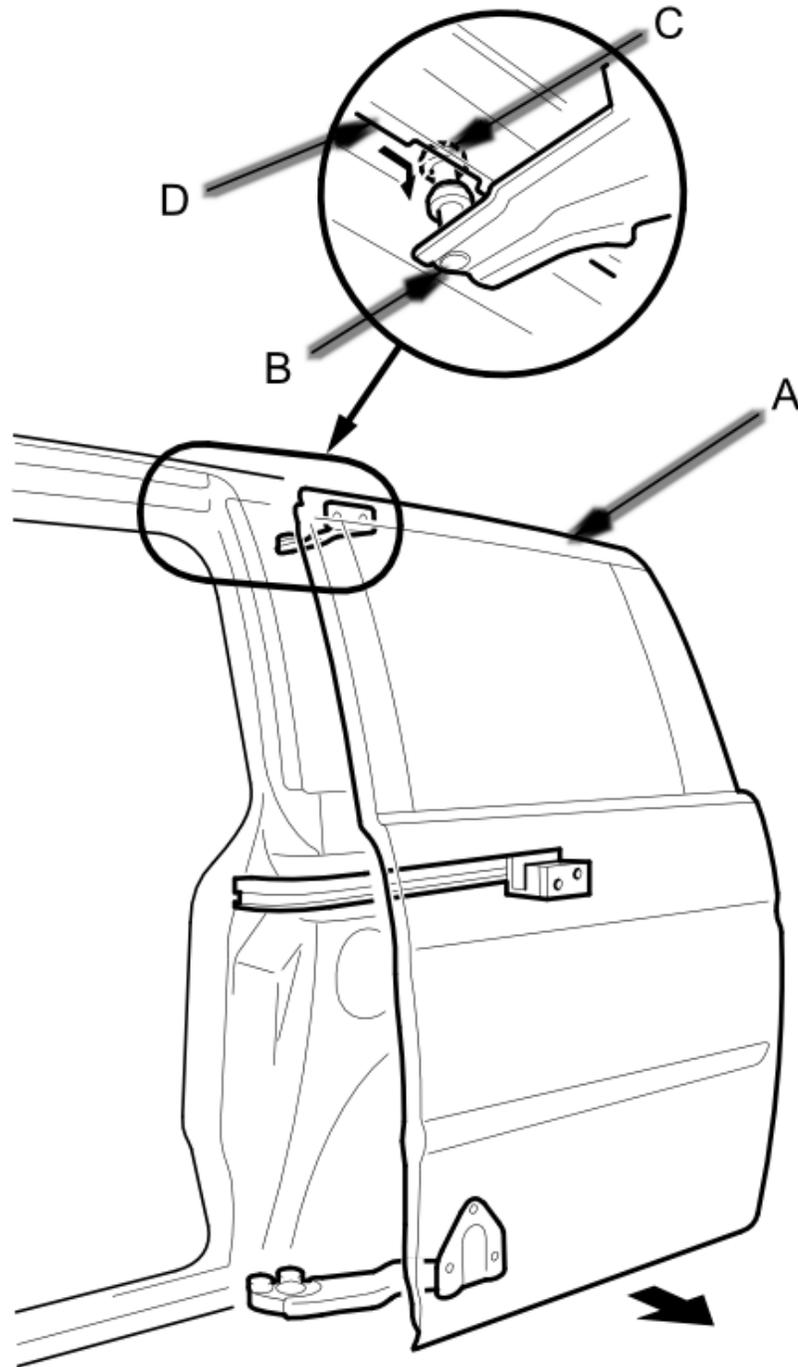

11. Remove the [sliding door](#).

12. Install the [sliding door](#) in the reverse order of removal, and note these items:

- Make sure the CESS articulated harness connectors are plugged in properly.
- Clean the groove area of each rail, and apply multipurpose grease to the moving area of the lower roller plate (A) and along the entire length of moving area of the lower rail (B). If equipped with the power [sliding door](#), apply multipurpose grease to the corner area of the center rail (C), as shown.
- Make sure the door opens properly and locks securely.
- [Check the sliding door position adjustment](#).
- [Check for water leaks](#).

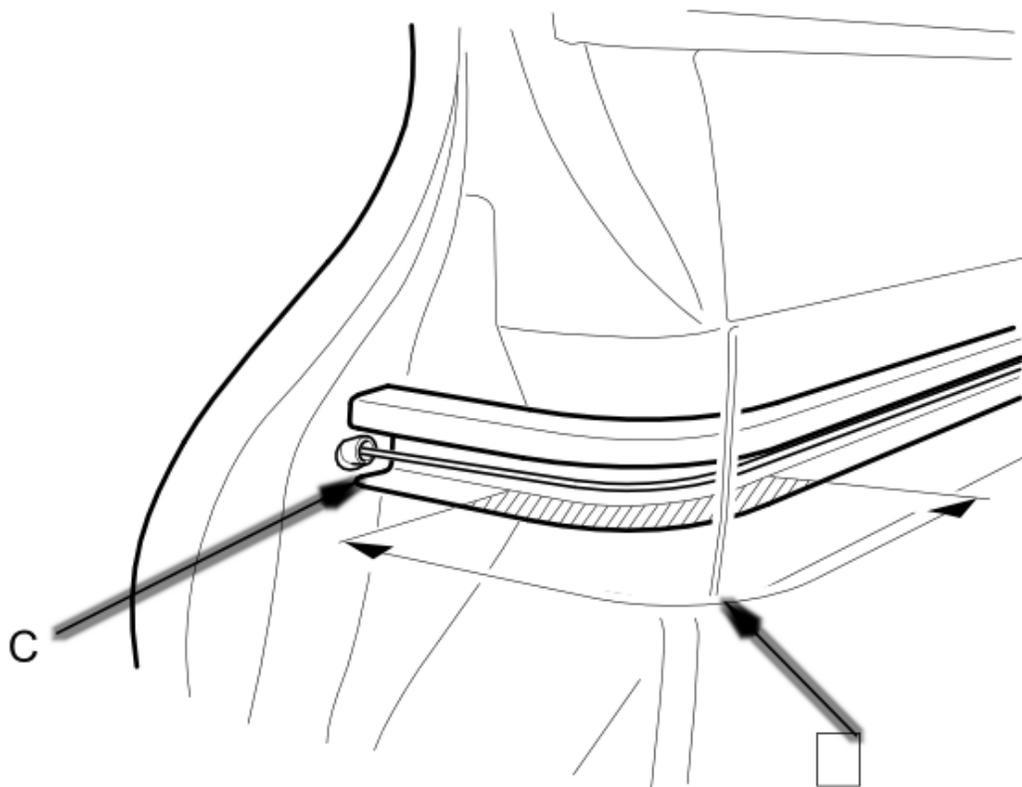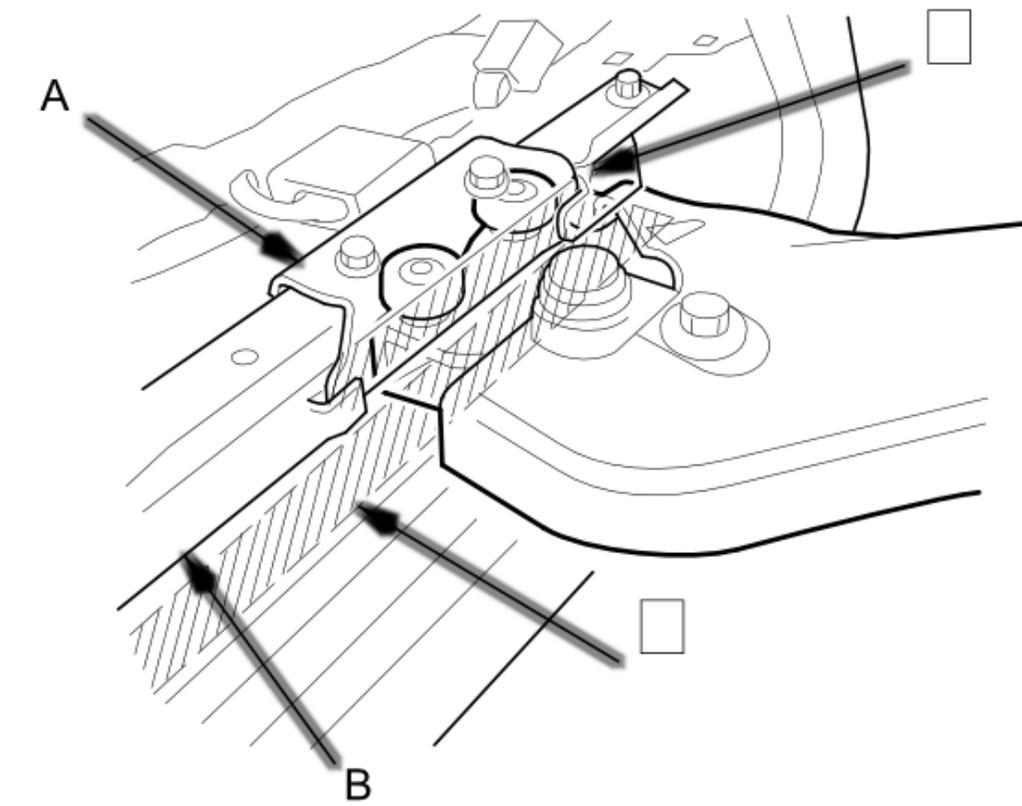

Portions of materials contained herein are sourced from American Honda Motor Inc., Co.

Copyright 2009 - 2013 Service Repair Solutions, Inc.