AR88.70-P-9020TX	Remove/install mirror lens	9.5.06

MODEL 211.0 /2 /6 as of 1.6.06, 219, 216, 221

Shown on model 219

1 Mirror lens
2 Mounting wedge
3 Catch hook
4 Support spring

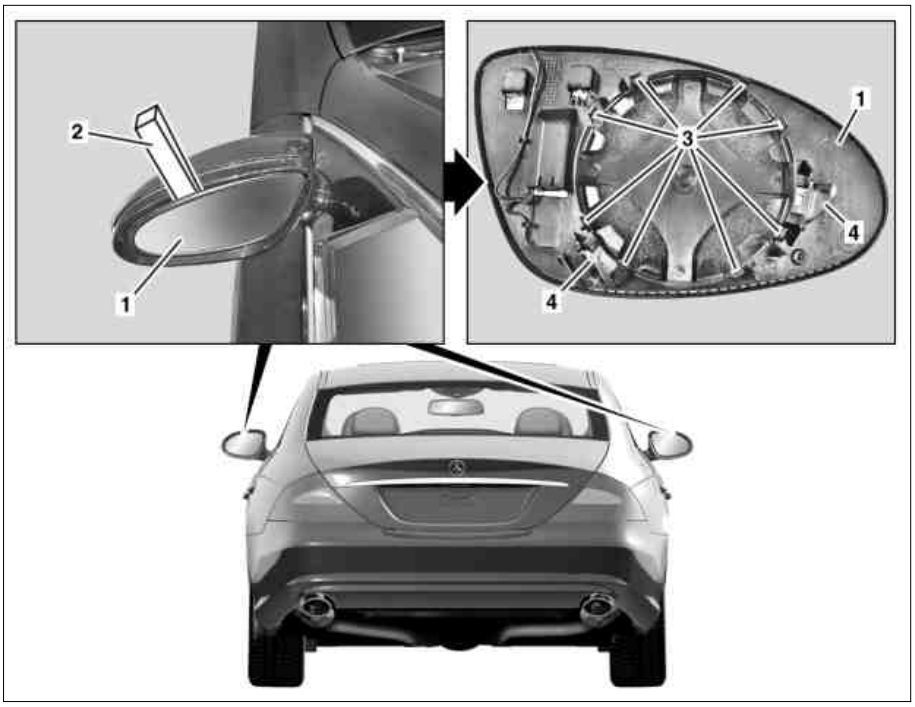

P88.70-2355-06

	Remove/install		
Danger!	**Risk of injury** Skin, eye and respiratory system irritation may occur through contact or inhalation of substances contained in the mirror lens.	Wear protective gloves and safety glasses.	AS60.00-Z-0008-01R
1	Tilt mirror lens (1) out upward		
2	Press mirror glass (1) off of mirror glass adjustment drive with mounting wedge (2)	Mounting wedge Installation: Clip mirror lens (1) into glass adjustment drive from bottom upward. Ensure that catch hook (3) arrests completely.	*110589035900
3	Disconnect electrical connectors and remove mirror lens (1)		
4	Install in the reverse order		



110 589 03 59 00

Wedge tool